

Straight drill/milling unit with Coromant Capto™


Suitable for standard turret (not VDI turret)

Check max. available tool length!

Ratio = 1:1

Max. coolant pressure = 435 PSI (30 bar)

(Check specified coolant pressure diagram!)

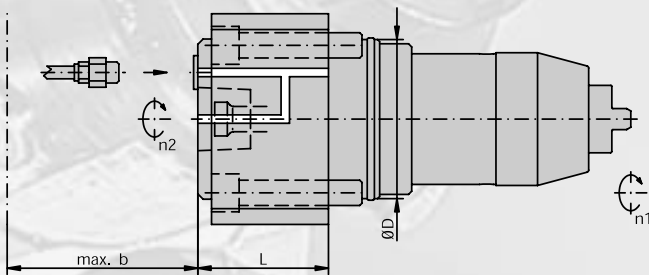

4101... (IC) with internal + external coolant supply

Torque wrench must be used!

Item No.	Turret specification			Clamping System		Dimensions / Data				Coolant	Drw. No.
	ØD	Machine Manufacturer	Max. RPM	Size	b	L1	M Nm	Ratio n1:n2	Pressure diagram	343-830820...	
410104002-65	65	Daewoo Puma 300 M Daewoo Puma 300 MS Daewoo Puma MX/TT 2000, 2500	4000*	C4	69 76 70	62	63	1:1	D01007	... N725	
410105011-75	75	Daewoo Puma 400 M/LM	4000*	C5	109	78	100	1:1	D01010	... N911	
410105001-85	85	Daewoo Puma 600, 700 M/LM	4000*	C5	131	73	140	1:1	D01010	... N708	
410104004-65	65	Nakamura Super NTX	4000*	C4	100	70	63	1:1	D01010	... N895	
410104001-75	75	Nakamura STS-40, STW-40, TW-30	4000*	C4	90	62	63	1:1	D01010	... N398	

*(IC) not for turret option with max. RPM = 6000.

4101... (EC) with external coolant supply only

Torque wrench must be used!

Item No.	Turret specification			Clamping System		Dimensions / Data				Drw. No.
	ØD	Machine manufacturer	Max. RPM	Size	b	L1	M Nm	Ratio n1:n2	343-830820...	
410103000-55	55	Daewoo Puma 200, 230, 240, 250 M Daewoo Puma 1500, 2000, 2500 Y	6000	C3	62 80	50	32	1:1	... N883	
410104001-65	65	Daewoo Puma 300 M Daewoo Puma 300 MS Daewoo Puma MX/TT 2000, 2500	6000	C4	69 76 70	62	63	1:1	... N687	
410105012-75	75	Daewoo Puma 400 M/LM	4000	C5	109	78	100	1:1	... N1147	
410105002-85	85	Daewoo Puma 600, 700 M/LM	4000	C5	131	73	140	1:1	... N735	
410103002-55	55	Nakamura Super NTJ, Super NTM Nakamura TW-10 Nakamura TW-20 (16 stations turret) Nakamura WT-150, WT-250 Nakamura WTS-150, WTW-150	6000	C3	62	50	32	1:1	... N1162	
410104003-65	65	Nakamura Super NTX	6000	C4	100	70	63	1:1	... N894	
410104000-75	75	Nakamura STS-40, STW-40, TW-30	6000	C4	90	62	63	1:1	... N397	