


Right angle double spindle drill/milling unit with Coromant Capto™

Suitable for standard turret (not VDI turret)
Check max. available tool length!

Ratio = 1:1

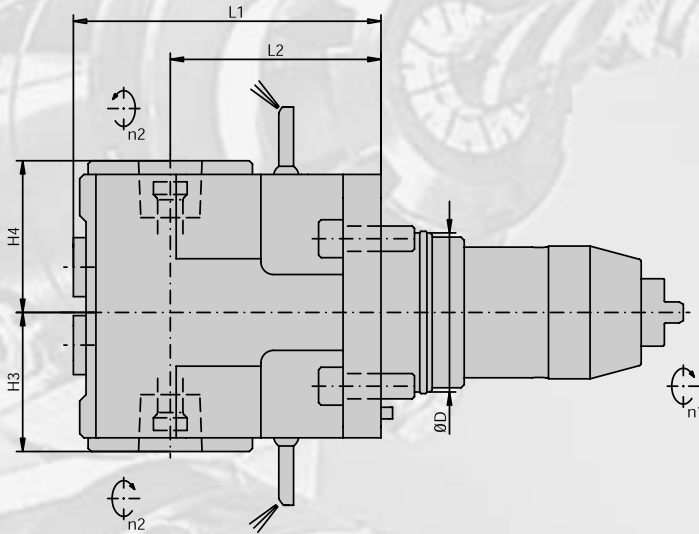

4105... (EC) with external coolant supply only

Torque wrench must be used!

Item No.	Turret specification			Clamping System		Dimensions / Data					Drw. No.
	ØD	Machine manufacturer	Max. RPM	Size	L1	L2	H3 H4	M Nm	Ratio n1:n2		
410503004-55	55	Daewoo Puma 200, 230, 250 M Daewoo Puma 1500, 2000, 2500 Y	6000	C3	104	70	50 58	32	1:1	343-830820... ... N1142	
410504008-65	65	Daewoo Puma 300 M/MS Daewoo TX200M/Y	6000	C4	117	78	64 70	63	1:1	... N1143	
410503005-55	55	Nakamura Super NTJ Nakamura TW-10 Nakamura TW-20 (16 stations turret) Nakamura WT-150 Nakamura WT-250	6000	C3	89	55	50 58	32	1:1	... N1144	
410504007-65	65	Nakamura Super NTX, TW-20 Nakamura WT-300	6000	C4	111	65	64 70	63	1:1	... N1145	
410504035-75	75	Nakamura STS-40, STW-40, TW-30	6000	C4	139	100	64 70	63	1:1	... N967	