


## Right angle drill/milling unit with Coromant Capto™ - HIGH PRESSURE -

Suitable for standard turret

Ratio = 1:1

Max. coolant pressure = 1100 PSI (80 bar)

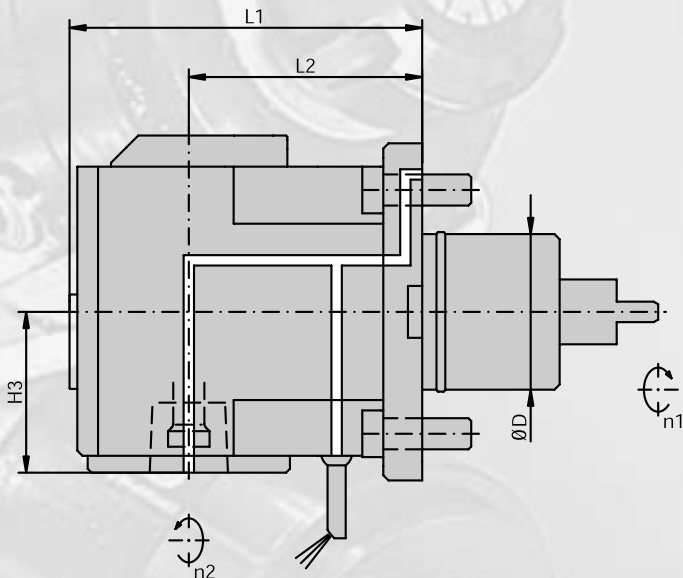

### 4105... (IC - HP) with internal + external coolant supply

Torque wrench must be used!

Item No.	Turret specification			Clamping System	Dimensions / Data					Coolant	Drw. No.
	ØD	Machine manufacturer	Max. RPM		Size	L1	L2	H3	M Nm		
<b>410504040-60</b>	60	Mori Seiki NL-1000, -1500, -2500	6000	C4	136	90	60	63	1:1	D01013	343-830820... ... N1121
<b>410505048-60</b>	60	Mori Seiki NL-1000, -1500, -2500	6000	C5	136	90	60	63	1:1	D01013	... N1152

### 4105... (EC) with external coolant supply only

Torque wrench must be used!

Item No.	Turret specification			Clamping System	Dimensions / Data					Drw. No.	
	ØD	Machine manufacturer	Max. RPM		Size	L1	L2	H3	M Nm		Ratio n1:n2
<b>410504039-60</b>	60	Mori Seiki NL-1000, -1500, -2500	6000	C4	136	90	60	63	1:1		... N1120
<b>410505047-60</b>	60	Mori Seiki NL-1000, -1500, -2500	6000	C5	136	90	60	63	1:1		... N1151